

Intrusive Capacitance Switch

Features

- ✓ Available in short and long sensor lengths for flexible installation
- ✓ Compatible with Flowline alarm, controller and fitting accessories

Specifications

Orientation:	Universal
Accuracy:	± 1 mm in water
Repeatability:	± 0.5 mm in water
Dielectric range:	> 20 constants
Conductive range:	> 100 micromhos
Supply voltage:	12-36 VDC
Consumption:	25 mA maximum
Contact type:	(1) SPST relay
Contact rating:	60 VA
Contact output:	Selectable NO/NC
Process temp.:	F: -40° to 176° C: -40° to 80°
Pressure:	150 psi (10 bar) @ 25° C., derated @ 1.667 psi (.113 bar) per °C. above 25° C.
Sensor rating:	NEMA 6 (IP68): PP NEMA 4X (IP65): PFA
Sensor material:	1__5: PP 2__5: PFA
Cable jacket mat.:	1__5: PP 2__5: PFA
Cable type:	4-conductor, #22 AWG (shielded)
Cable length:	Standard: 10' (3m) Special order: 25' (7.6m) or 50' (15.2m)
Process mount:	3/4" NPT (3/4" G / Rp)
Mount. gasket:	Viton® (G version only)
Classification:	General purpose
CE compliance:	EN 61326 EMC EN 61010-1 safety



Description

The general purpose intrusive capacitance level switch is an excellent choice for a wide range of relatively clean, aqueous based conductive liquids with non-coating and/or scaling characteristics. Media examples include hydrogen peroxide and chromic acid. The 1A relay provides a reliable switch interface with remote devices such as a PLC, SCADA or alarm. The sensor is universally mounted through the wall or inside the tank.

Capacitance Ordering

LP10-□□□5

Sensor material (1)

- 1 PP
- 2 PFA

Sensor length

- 3 Short
- 4 Long


Process mount (2) (3)

- 0 3/4" NPT (US)
- 2 3/4" G / Rp (Metric)


Ordering Notes

- 1) To special order a 25' (7.6m) or 50' (15.2 m) sensor cable, place the cable length at the end of the part number (ie: LP10-1305-25').
- 2) The short Metric sensor is offered with conical Rp threads on both sides of the wrench flat. The long Metric sensor is offered with straight G threads on the sensing side and conical Rp threads on the cable side of the wrench flat.
- 3) The straight G thread version seals with an included Viton® mounting gasket.

LP10 Long Version

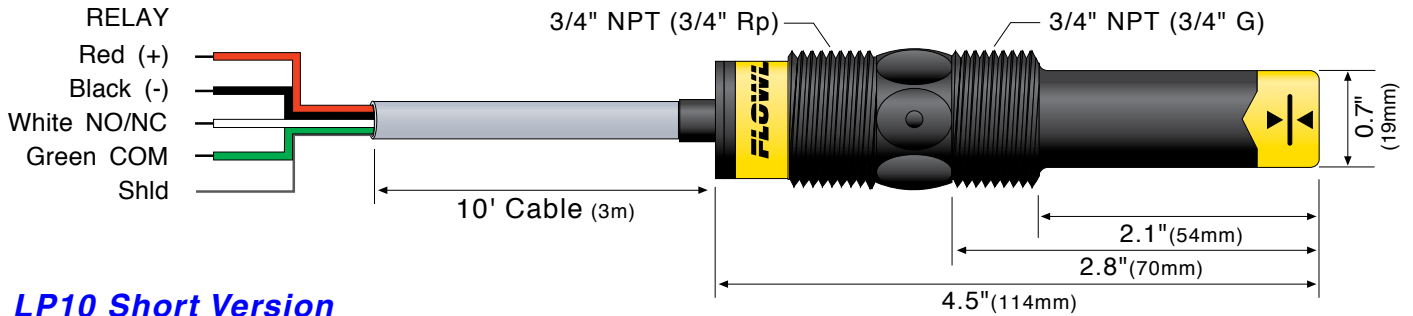


LP10 Short Version

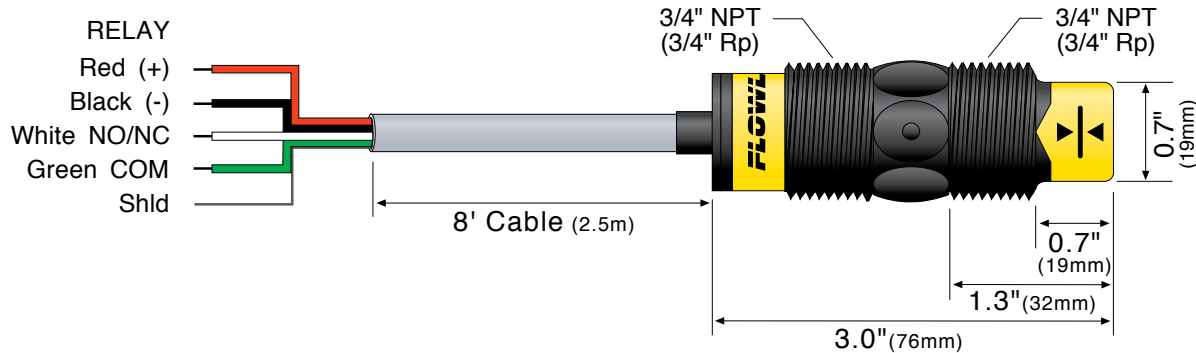

Specifications are subject to change without notice.


NO Output - DC Powered Load

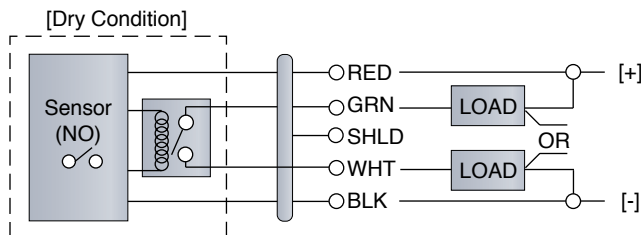

SENSOR POWER
[RED & BLK Wires]
36 VDC Max.
5 ±1 mA Dry
19 ±1 mA Wet

RELAY RATING
[GRN & WHT Wires]
60 VA Max.


NC Output - DC Powered Load

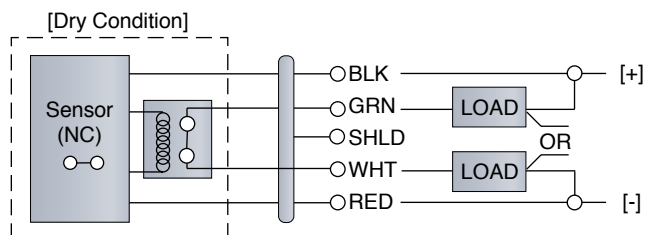

SENSOR POWER
[RED & BLK Wires]
36 VDC Max.
19 ±1 mA Dry
5 ±1 mA Wet

RELAY RATING
[GRN & WHT Wires]
60 VA Max.


NO Output - AC Powered Load

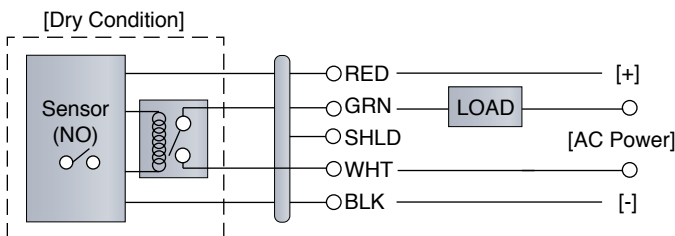

SENSOR POWER
[RED & BLK Wires]
36 VDC Max.
5 ±1 mA Dry
19 ±1 mA Wet

RELAY RATING
[GRN & WHT Wires]
60 VA Max.

NC Output - AC Powered Load

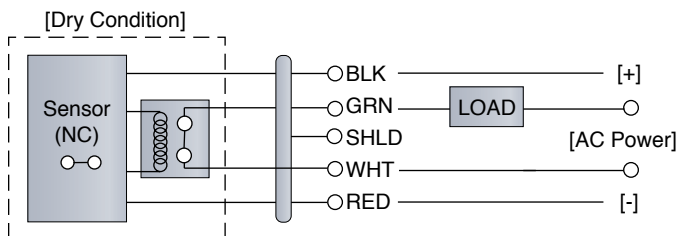

SENSOR POWER
[RED & BLK Wires]
36 VDC Max.
19 ±1 mA Dry
5 ±1 mA Wet

RELAY RATING
[GRN & WHT Wires]
60 VA Max.